

Link do produktu: <https://www.illuminations.pl/futc06-naswietlacz-halogen-led-milight-50w-rgbccct-oswietlenie-ogrodowe-led-p-2654.html>



FUTC06 Naświetlacz / halogen LED MILIGHT - 50W RGB+CCT oświetlenie ogrodowe LED

Cena	830,25 zł
Dostępność	Dostępny
Czas wysyłki	14 dni
Numer katalogowy	2654
Producent	Mi.Light

Opis produktu

Nazwa produktu: Oświetlenie ogrodowe LED 50 W RGB + CCT

Nr modelu: FUTC06

Moc: 50W

Napięcie wejściowe: AC100 ~ 240V 50/60Hz

Temperatura pracy: -20-60°C

Temperatura barwowa: 2700 K ~ 6500 K

Strumień świetlny: 4000 lm

Wydajność świetlna: 80LM/W

CRI: >80

PF: >0,9

Żywotność: 50000 godzin

Kąt świecenia: 25°

Odległość oświetlenia: >15m

Stopień ochrony IP: IP65

Częstotliwość radiowa: 2,4 GHz

Odległość kontrolna: 30m

Control Distance: 30m

50W RGB+CCT LED Garden Light

2.4GHz Remote control & APP control, Support Third Party Voice Control,
Automatic commands transmitting function, Auto-synchronization



16 million
colors change



CCT
Adjustable



Dimmable
Saturation control

IP65

IP65
waterproof rate



2.4GHz RF Remote Control

The lamp is controlled by 2.4GHz wireless remote; Control distance is within 30m



Compatible with



FUT089



FUT088



FUT092



FUT095



FUT096



B8



B4/T4



B3/T3



B0



WL-Box1

Support Smart phone APP control and third party voice control

It need 2.4GHz gateway(WL-Box1) for smart phone control or third party voice control




2.4GHz Gateway
WL-Box1

16 Million colors / Saturation control



Brightness adjustable & Color temperature adjustable

Brightness adjustable, Adjust the color temperature from 2700-6500K,
make the light you want

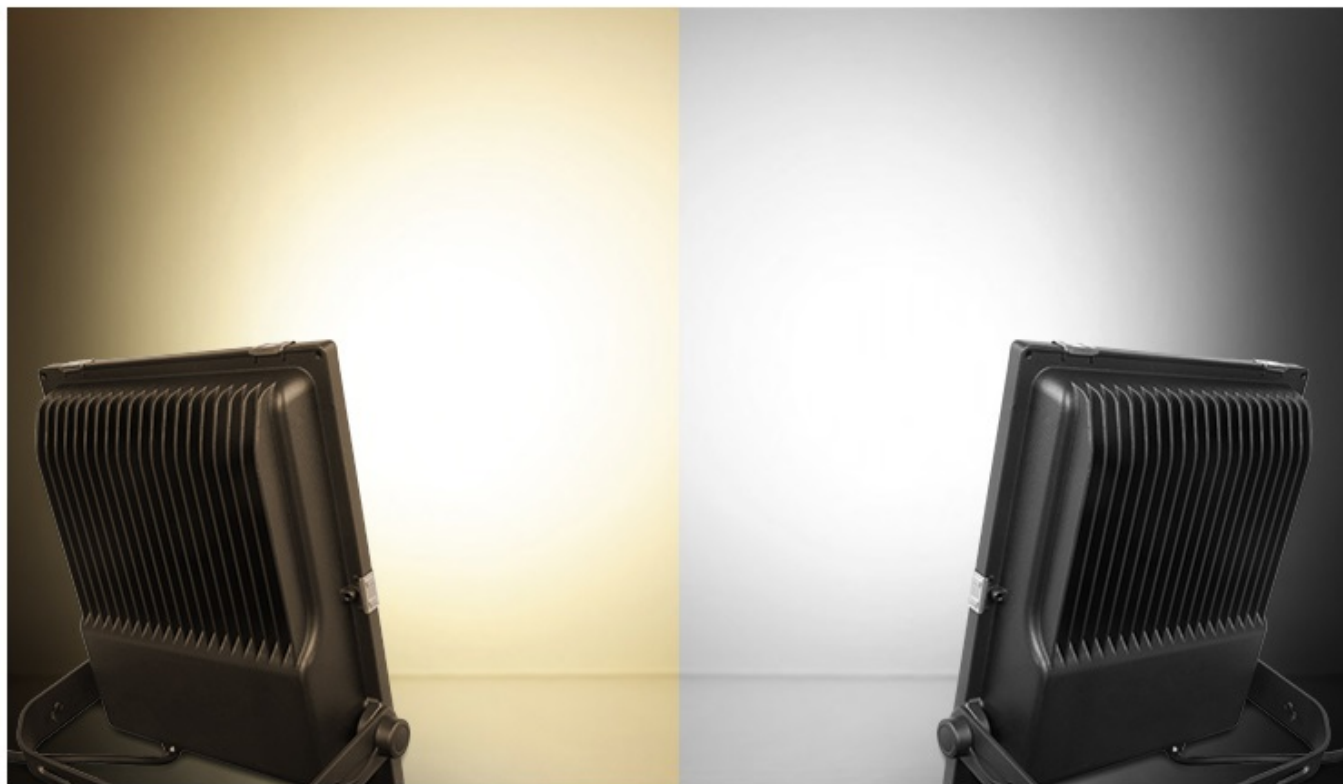

IP65 Waterproof

Professional waterproof technology,
high performance waterproof




Signal transmitting

One lighting fixture can transmit the signals from the remote control to another lighting fixture within 30m, as long as there is a lighting fixture within 30m, the remote control distance can be limitless.

Modes synchronization

Different lighting fixture can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

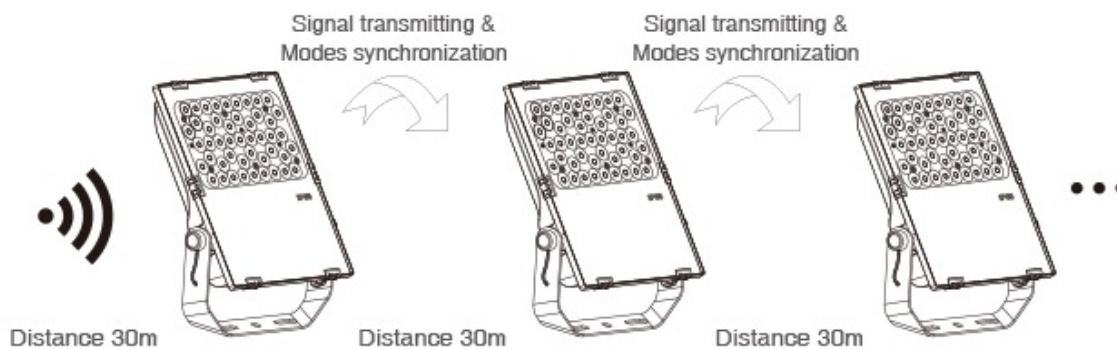

High lumen LED Chips

Low power consumption
and luminance decrease;
Bright color and high brightness

Optical Lens

Anti-dazzling optical lens; diverging
light scientifically. Symmetrical and
bright light ray



High efficiency heat dissipation

Integrative Aluminum design; Inserted thermal conduction, Protect light source lifespan



Waterproof plug

Copper nickel plating material,
Waterproof and dustproof, never rusting

