

Link do produktu: <https://www.illuminations.pl/sys-rd2-milight-9w-rgbcct-led-lampa-gruntowa-ip68-p-2316.html>

SYS-RD2 - MILIGHT - 9W RGB+CCT LED lampa gruntowa IP68

Cena	344,40 zł
Dostępność	Dostępny
Czas wysyłki	14 dni
Numer katalogowy	2316
Producent	Mi.Light

Opis produktu

Nazwa produktu: lampa gruntowa LED 9 W RGB + CCT
(Lampa podrzędna)
Model nr: SYS-RD2
Napięcie wejściowe: DC24V
Moc: 9W
Temperatura pracy: -20 ~ 60 °C
Temperatura barwowa: 2700 ~ 6500 K
Strumień świetlny: 700 lm
Wydajność świetlna: 80LM/W
CRI: >80
Żywotność: 50000h
Kąt świecenia: 15°
Stopień ochrony IP: IP68

RGB+CCT LED Underground Light (Subordinate Lamp)

Connecting the "SYS-T1 Controller" or "SYS-PT1 Controller Box" to fulfill the wireless remote control; 16 million color change, color temperature, brightness and saturation adjustable randomly



16 million
colors change



CCT
Adjustable



Dimmable
Saturation control



IP68
waterproof rate

This product has to be connected to
"SYS-T1 Controller" or "SYS-PT1 Controller Box"
to fulfill the remote controlling



Smart lifestyle with beauty

16 million colors change, saturation adjustable

Make smart lighting atmosphere meet all your requirement



Brightness adjustable & Color temperature adjustable

Brightness adjustable, Adjust the color temperature from 2700-6500K,
make the light you want



IP68 Many steps waterproofing; waterproof rate IP68

Silicone rubber sealing make sure the excellent
waterproofness and safety usage





Stainless steel surface ring

High quality stainless steel materials;
not easy to fade and sunproof



Stalinite mask

Made of high quality stalinite, High hardness, nonbreakable and high light-transmittance




Optical Lens

Anti-dazzling optical lens; diverging light scientifically. Symmetrical and bright light ray



End cap screw

Stainless steel material,
Waterproof and dustproof

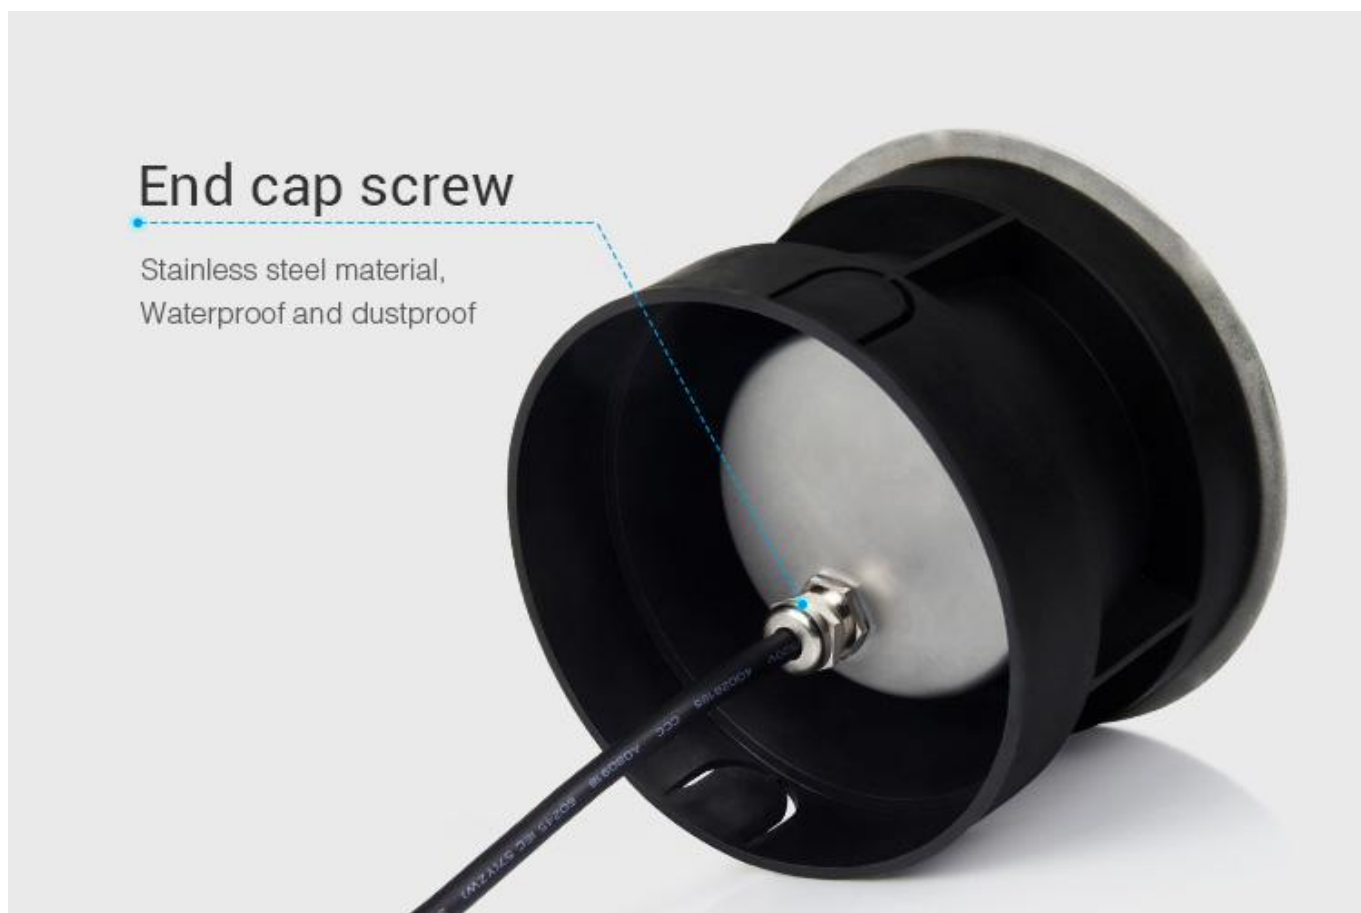



Integrated convection heat dissipation

Convection design, better heat dissipation,
safe and stable



Product accessories


Note: this pack products not include accessories,
Please purchase separately if you require it



mini T 3-channel and 3-core waterproof connector(IP68)

Connection Diagram

Note: The "SYS-T1 Controller and SYS-PT1 Controller Box" has to be purchased separately.

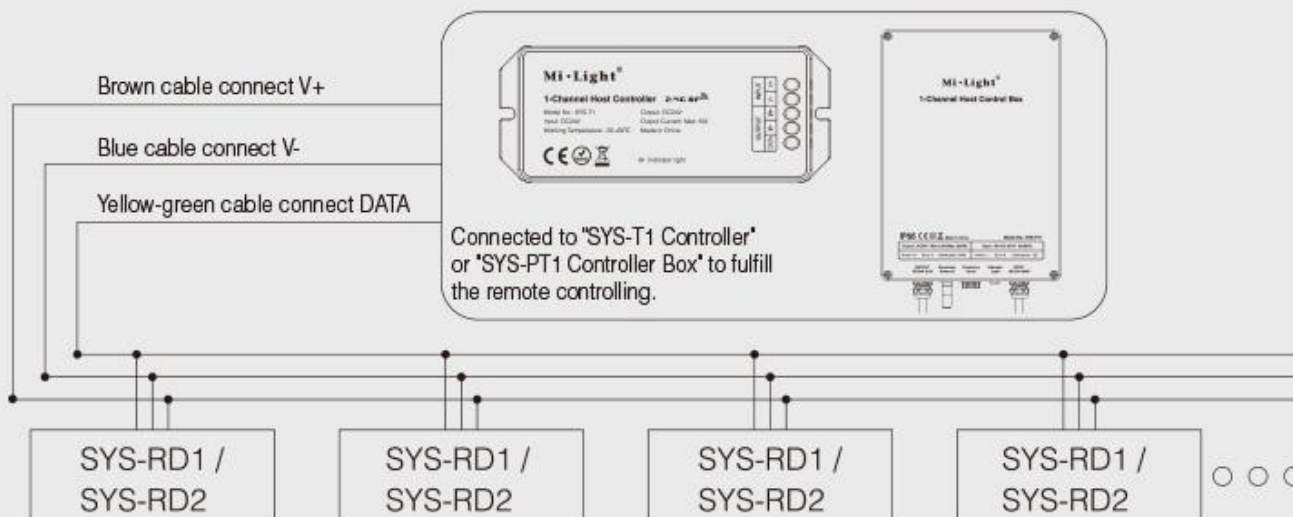

Note: When using "SYS-T1 controller or SYS-PT1 controller box", you need to add 'SYS-T2 1-channel signal amplifier or SYS-PT2 1-channel amplifier box' for below 3 situations.

1. Connecting over 50pcs lights.
2. Connected cable length over 300m.
3. Output power over (SYS-T1: 360W) / (SYS-PT1: 220W).

