

Link do produktu: <https://www.illuminations.pl/sys-rl1-milight-wall-washer-light-24w-rgbccct-p-2311.html>

SYS-RL1 - MILIGHT - Wall Washer Light 24W RGB+CCT

Cena	999,00 zł
Dostępność	Dostępny
Czas wysyłki	14 dni
Numer katalogowy	2311
Producent	Mi.Light

Opis produktu

Product Name: RGB+CCT LED Wall Washer Light

(Subordinate Lamp)

Model No.: SYS-RL1

Input Voltage: DC24V

Power: 24W

Working Temperature: -20~60°C

Color temperature: 2700~6500K

Luminous Flux: 1800LM

Light Efficiency: 75LM/W

CRI: >80

Lifespan: 50000h

Beam Angle: 15*60°

Illumination distance: >15m

IP Rate: IP66

Housing Material: Die-cast aluminum, stalinite

RGB+CCT LED Wall Washer Light (Subordinate Lamp)

Connecting the controller(SYS-T1) to fulfill the wireless remote control;
16million color change, color temperature, brightness
and saturation adjustable randomly



16 million
colors change



CCT
Adjustable



Dimmable
Saturation control



IP66
waterproof rate




Connecting the controller(SYS-T1) to fulfill the wireless remote control



Color temperature and brightness adjustable randomly

Color temperature and brightness adjustable making many kinds of lighting atmosphere

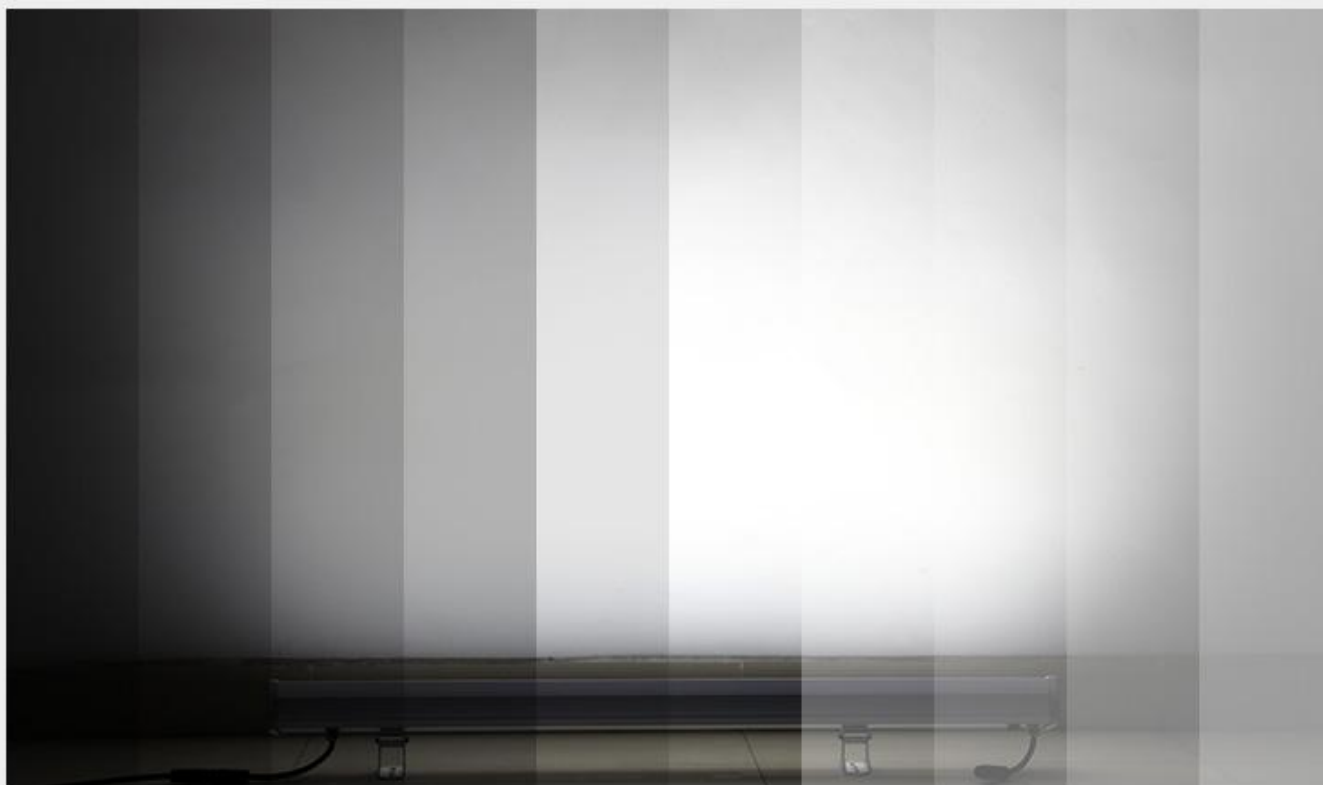

2700K

6500K


IP66 waterproof rate

Excellent waterproofness make the usage more safe



180° rotatable bracket; Easy installation

180° rotatable bracket; Adjustable randomly; Easy adjust the beam angle

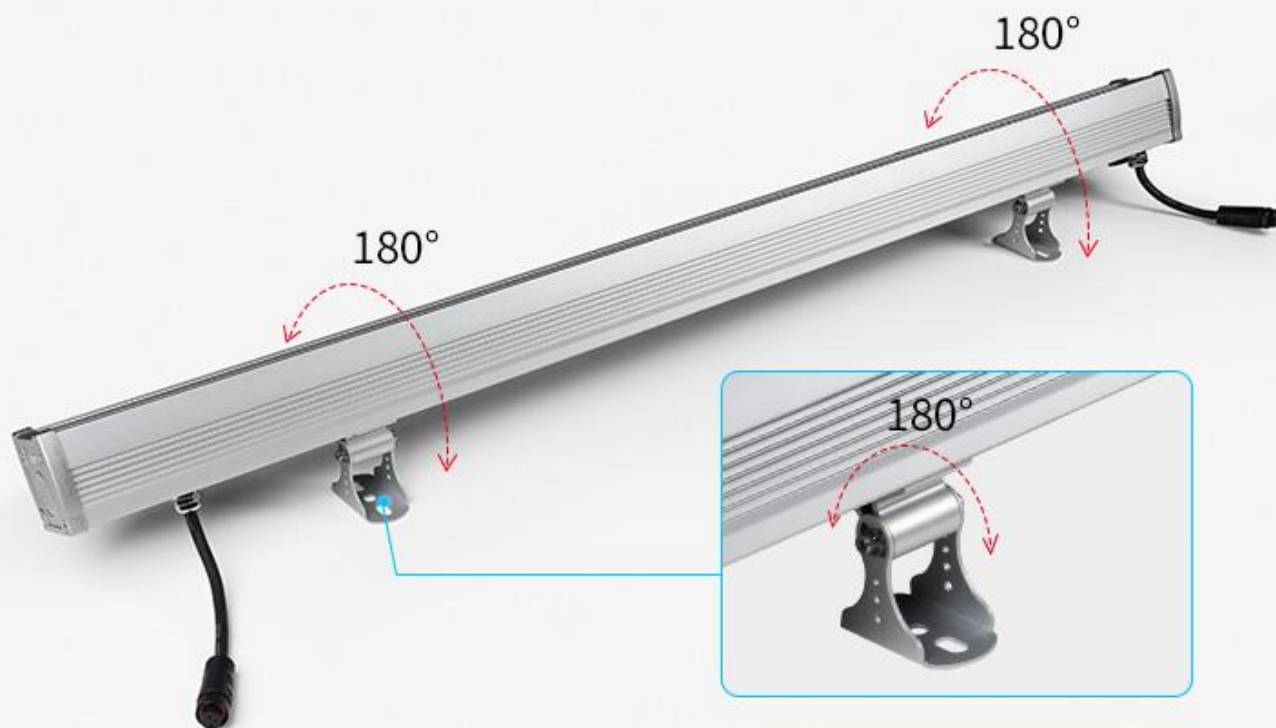

High lumen LED Chips

High lumen LED chips; Low power consumption and luminance decrease; Bright color and high brightness



Optical Lens

High lighting transmitting rate;
Wide beam angle and long illumination distance





Pure copper connector

Easy installation and high waterproofness



Thicken Aluminum base

Anti-corrosion; adjustable angle randomly



End cap screw

Stainless steel material, waterproof and dustproof



Product accessories

Note: This pack products not include accessories, Please purchase separately if you require it



X 4-channel and 3-core waterproof connector(IP68)



T 3-channel and 3-core waterproof connector(IP68)



Straight 3-core waterproof connector(IP68)




3-core waterproof female connector(IP68)



3-core waterproof male connector(IP68)

Connection Diagram

Note: The "SYS-T1 Controller" has to be purchased separately

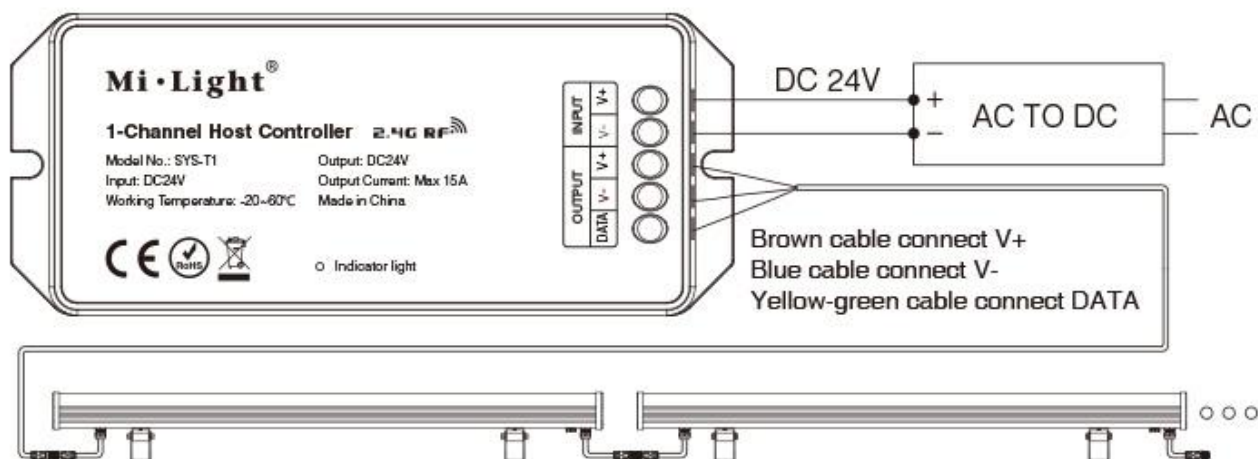

Note: When using "SYS-T1 controller", you need to add "SYS-T2 1-channel signal amplifier" for below 3 situations.

1. Connecting over 50pcs lights.
2. Connected cable length over 300m.
3. Output power over 360W.

All connected lights to "SYS-T1 Controller" cannot be over 360W, otherwise, it will damage the controller.

